Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

KEY FEATURE

- 360°Omni-directional lighting.
- Ultra-bright: 120lm/W.
- 6-10KV internal surge protection.
- Come with 10-foot 18AWG cord and 120V plug.
- Built-in connector, outlet for connecting up to 7 pieces.
- Suitable for dry and damp location.

- Portable hook, easy to carry and quick install.
- Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- · Isolated driver to ensure stable working situation.
- Waterproof rubber design for better waterproof performance.
- Operating temperature: -40 $^\circ\!\mathrm{C}/\text{-40}^\circ\!\mathrm{F}$ to $60\,^\circ\!\mathrm{C}/\text{140}\,^\circ\!\mathrm{F}$.



SPECIFICATION

Item NO.	Watt	Total Lumens	Led Quantity	Surge Voltage	ССТ	Input Voltage	CRI	Power Factor	Operating Temperature	Metal Halide Equivalent
227PORTALIGHT-60	60W	7200LM	270	6KV	5000K	AC100-277V, 50-60Hz	>80	>0.9	-40℃ to 60℃	250W

APPLICATION


- New Building Construction or Renovation.
- Maintenance or storage spaces in commercial or in stitutional facilitate.
- Short-term maintenance projects.
- Warehouses, factories, Exhibition halls and workshops.
- Highway toll stations and gas stations.






Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

DIMENSION

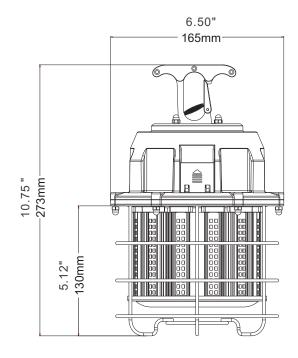



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Connector Design

Can connect in series up to 7 pieces (LED lights only) or single using.



PACKAGING

Power	60W				
Net Weight	4.41lb				
Master Carton	4 unit				
Master Carton(G.W.)	23.81lb				







Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

KEY FEATURE

- 360°Omni-directional lighting.
- Ultra-bright: 120lm/W.
- 6-10KV internal surge protection.
- Come with 10-foot 18AWG cord and 120V plug.
- Built-in connector, outlet for connecting up to 7 pieces.
- Suitable for dry and damp location.

- Portable hook, easy to carry and quick install.
- · Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- · Isolated driver to ensure stable working situation.
- Waterproof rubber design for better waterproof performance.
- Operating temperature: -40 $^\circ C/-40\,^\circ F\,$ to $\,60\,^\circ C/140\,^\circ F\,.$



Led Metal Halide Total Surge Input Power Operating Item NO. Watt CCT CRI Voltage Equivalent Quantity Voltage Temperature Lumens Factor AC100-277V, 227PORTALIGHT-100 100W 12000LM 408 6KV 5000K >80 >0.9 -40℃ to 60℃ 400W 50-60Hz

APPLICATION

- New Building Construction or Renovation.
- Maintenance or storage spaces in commercial or in stitutional facilitate.
- Short-term maintenance projects.
- Warehouses, factories, Exhibition halls and workshops.
- Highway toll stations and gas stations.







Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

PHOTOMETRICS







Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Connector Design

Can connect in series up to 7 pieces (LED lights only) or single using.



PACKAGING

Power	100W				
Net Weight	5.95lb				
Master Carton	4 unit				
Master Carton(G.W.)	28.22lb				





Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

KEY FEATURE

- 360°Omni-directional lighting.
- Ultra-bright: 120lm/W.
- 6-10KV internal surge protection.
- Come with 10-foot 18AWG cord and 120V plug.
- Built-in connector, outlet for connecting up to 7 pieces.
- Suitable for dry and damp location.

- Portable hook, easy to carry and quick install.
- · Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- · Isolated driver to ensure stable working situation.
- Waterproof rubber design for better waterproof performance.
- Operating temperature: -40 $^\circ C/-40\,^\circ F\,$ to $\,60\,^\circ C/140\,^\circ F\,.$



Item NO.	Watt	Total Lumens	Led Quantity	Surge Voltage	ССТ	Input Voltage	CRI	Power Factor	Operating Temperature	Metal Halide Equivalent
227PORTALIGHT-150	150W	18000LM	676	10KV	5000K	AC100-277V, 50-60Hz	>80	>0.9	-40℃ to 60℃	600W

APPLICATION

- New Building Construction or Renovation.
- Maintenance or storage spaces in commercial or in stitutional facilitate.
- Short-term maintenance projects.
- Warehouses, factories, Exhibition halls and workshops.
- Highway toll stations and gas stations.







Durable, Portable, Plug-n-Play, Lightweight, Ultra Bright Temporary Lighting

PHOTOMETRICS



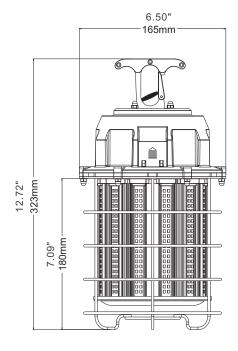



Connector Design

Can connect in series up to 7 pieces (LED lights only) or single using.



PACKAGING

Power	150W				
Net Weight	6.72lb				
Master Carton	4 unit				
Master Carton(G.W.)	33.73lb				



